

Model Name	
pictur	
Video	Resolution
Recording Bandwidth	Inputs
	out
Performance	
Live/Playback	Compression
	Frame rate
	AI
	Event
	Playback function
	Playback
	Fisheye
UI/Monitoring	Local
	WEB
	Mobile viewer
Interface	
P/W Reset	
Monitors	VGA
	HDMI 1
Connections	POE
	Ethernet
	USB
	Audio out

	HDD
General	
OSD Language	
Mechanical design	Dimension (WxDxH)
Electrical	Input Voltage/Current
	Power consumption (excluding hard
Environmental	Operating Temperature/Humi

RS-N7604HR-P



8MP,5MP, 3MP ,2MP(1080P),1.3MP(960P),1.0MP(720P)

50Mbps

64Mbps

Audio: G.711A;G.711U

Video : H.264/H.264+/H.265/H.265+

4K:45fps

4MP:90fps

2MP:180fps

yes

MD(Sensitivity Level 1~8)

Videlo loss

Beep, Email,

Fast forward / backward (2x, 4x, 8x,16x)

Slow forward (1/2x, 1/4x, 1/8x,1/16x)

Max 4CH playback

Use WEB CMS,device does not support

UI5.0

IE10/11

Safari V12.1 above

Firefox V.52 above

Google chrome V.57 above

Edge V.79 above

Rxcamview

Factory Reset : Press 10 seconds

1 (1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080)

1 (1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080 , 2560

4*RJ45、 802.3at/af

1 RJ45 10/100 Base-T

USB2.0*1(front)

USB2.0*1+(rear)

1

1 SATA, up to 10TB

English/French/Spanish/Portuguese/German/Italian/Greek/Danish

300X227X53mm

DC48V/1.2A PoE Switch :48V

5W

Temperature : -10°C~+50°C (14°F ~ 122°F) Humidity : Less than 90%RH
--

RS-N7708HR-P



128M
128M

Max 8CH playback

)*1440, 3840*2160/EDID)
8*RJ45、 802.3at/af
1 RJ45 100/1000 Base-T

h/Finnish/Russia/Hebrew/Turkish/Bulgarian/Arabic/Korean/Japane

DC48V/1.5A PoE Swith :48V
6W

RS-N7816HA-P



112M


96M

Max 16CH playback

16*RJ45、802.3at/af

se/Thai/Hindi/Romanian/Dutch/Polish
300X302X54mm
DC48V/3.75A
8W

RS-N7816HJ-P

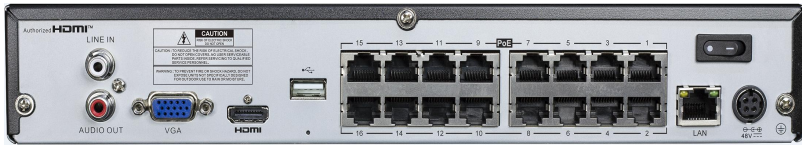

2 SATA, each HDD up to 10TB

EL-Link

Model Name		EL-NVR16-2HD-PRO
pictur		 
Video	Resolution	8MP,5MP, 3MP ,2MP(1080P),1.3MP(960P),1.0MP(720P)
Recording Bandwidth	Inputs	112M
	out	96M
Performance		
Live/Playback	Compression	Audio: G.711A;G.711U Video : H.264/H.264+/H.265/H.265+
	Frame rate	4K:45fps 4MP:90fps 2MP:180fps
	AI	yes
	Event	MD(Sensitivity Level 1~8)
		Videlo loss
		Beep, Email, Push notification to Mobile APP
	Playback function	Fast forward / backward (2x, 4x, 8x,16x) Slow forward (1/2x, 1/4x, 1/8x,1/16x)
	Playback	Max 16CH playback
	Fisheye	Use WEB CMS,device does not support
UI/Monitoring	Local	UI5.0
	WEB	IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above
	Mobile viewer	Rxcamview
	Push Notification	yes
Interface		
P/W Reset		Factory Reset : Press 10 seconds
Monitors	VGA	1 (1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080)

MONITOR	HDMI	1 (1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080 , 2560*1440, 3840*2160/EDID)
Connections	POE	N/A
	Ethernet	1 RJ45 100/1000 Base-T
	USB	USB2.0*1(front) USB2.0*1+(rear)
	Audio out	1
	E-sata	1 optional, not supported by default
	HDD	1 SATA HDD, up to 10TB
General		
OSD Language		English/French/Spanish/Portuguese/German/Italian/Greek/Danish/Finnish/Russia/Hebrew/Turkish/Bulgarian/Arabic/Korean/Japanese/Thai/Hindi/Romanian/Dutch/Polish
Mechanical design	Dimension (WxDxH)	300X227X53mm
Electrical	Input Voltage/Current	DC12V/2A
	Power consumption (excluding hard disk)	4W
Environmental	Operating Temperature/Humidity	Temperature : -10°C~+50°C (14°F ~ 122°F) Humidity : Less than 90%RH